


Product Catalogue



www.bacamak.com.tr

*To make
the world
breathe*

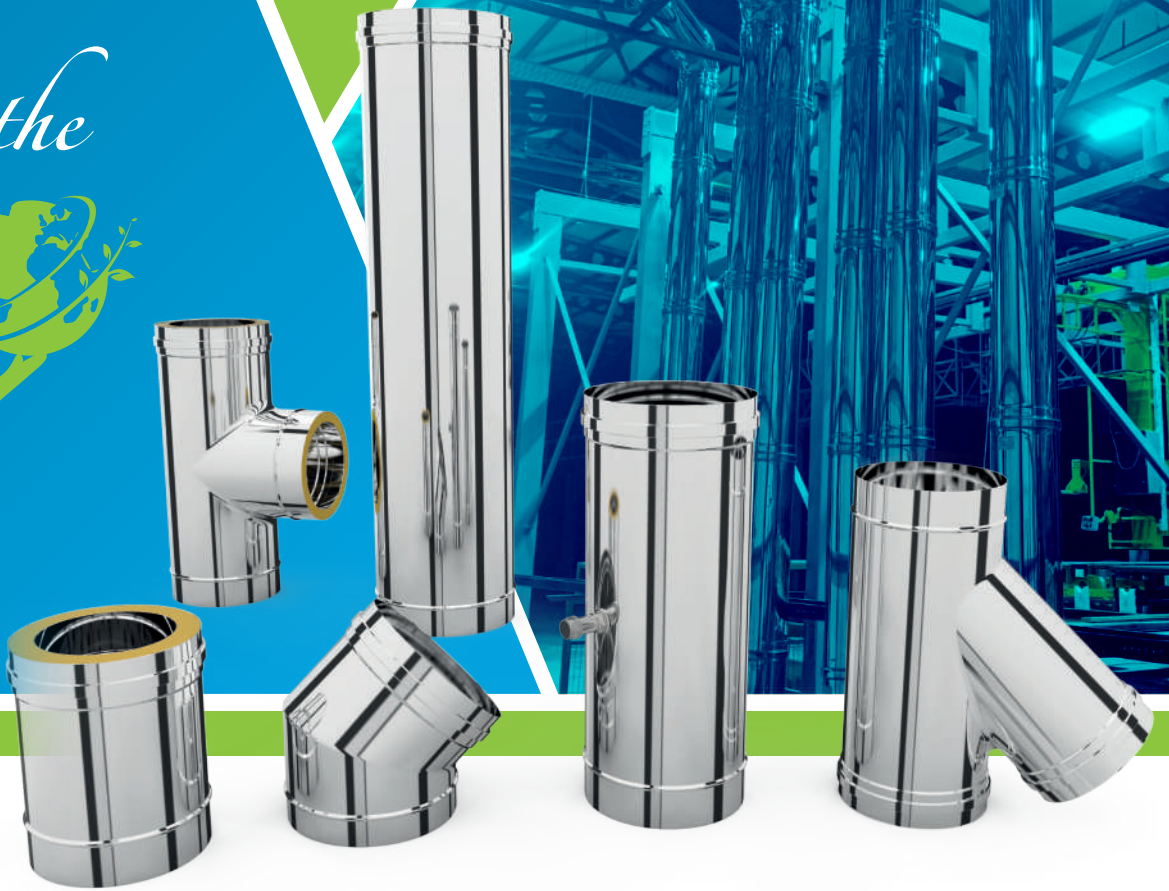

ALPINOX
Chimney Engineer



To make the world breathe



www.bacamak.com.tr

ABOUT US

Our company was founded in 2008 and has stepped in the chimney industry. It is based in Turkey and exports its products abroad. It has a wide range of products and each manufactured product is CE certified. It combines quality, performance, aesthetics and economy and manufactures with a machine park that changes in parallel with the developing technology.

Having joined in the ventilation sector in 2014, **BACAMAK** continues its production and accessory material supply without sacrificing from quality. It is aimed to meet the needs of customers according to their preferences with CE certified products in both chimney systems and ventilation sector and provide long-lasting and reliable service. It designs and implements systems that prioritize environmentally and nature-friendly human health and safety, which builds on information based on technical bases and saves energy throughout Turkey and the world.



MISSION

To ensure the procurement as soon as possible by taking the quality under guarantee. To ensure reliability by prioritizing its principles of the work ethics. To leave a healthy environment to the next generations with its knowledge gained over the years, R&D studies and references.




VISION

To continue to take its place to the top levels by prioritizing the principles of quality, performance and reliability and business ethics worldwide.


OUR QUALITY POLICY


Constantly keeping up its R&D activities with its continuously updated calculations, analysis and material database, **Bacamak** continues its production by adapting itself with the requirements of technology. Thus, it tries to keep human-factor errors out of the system by mechanization.

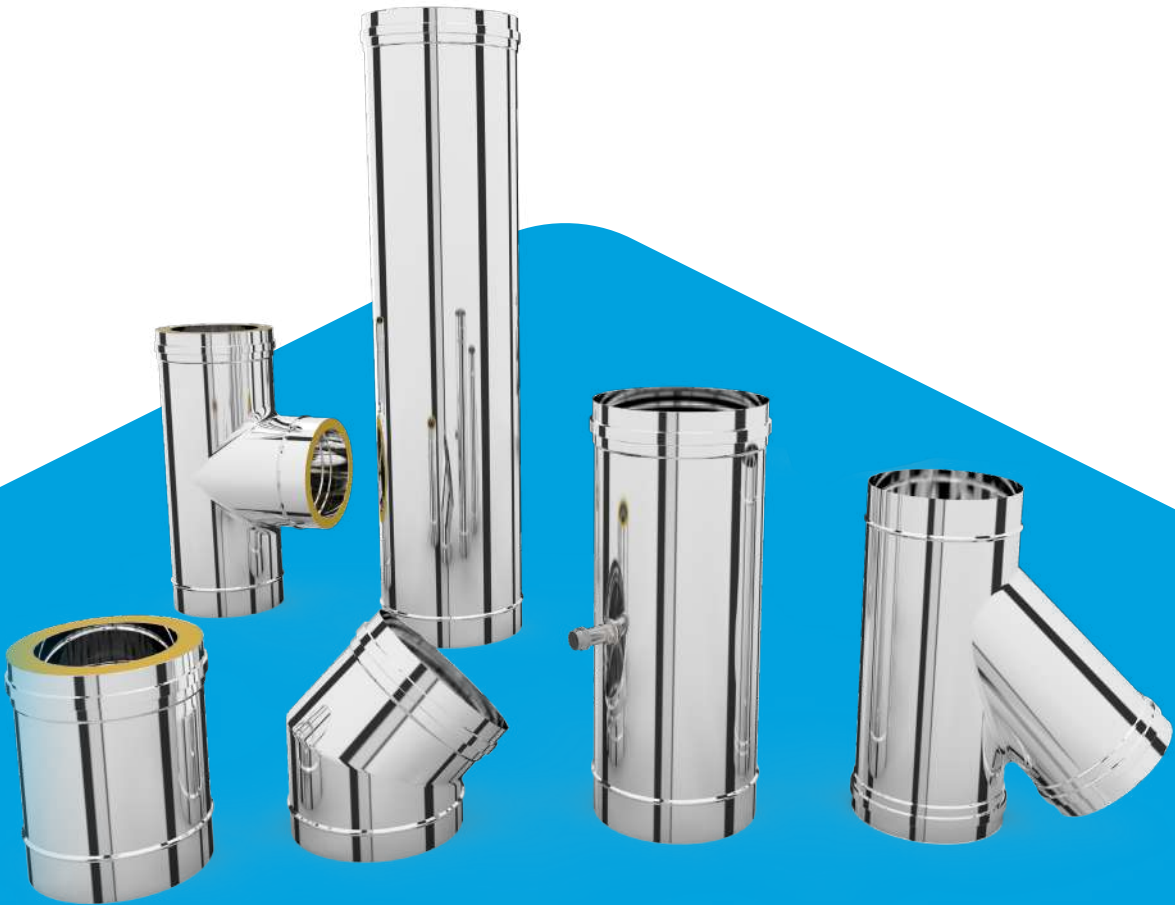

BACAMAK

OUR CERTIFICATES

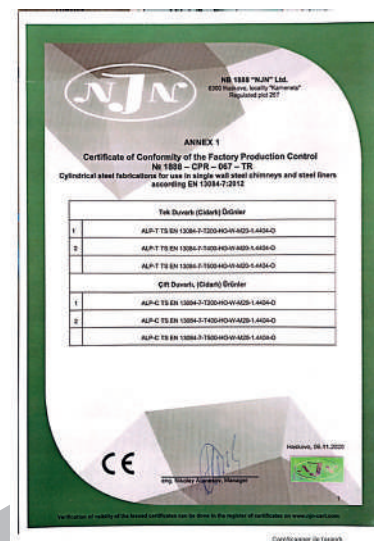

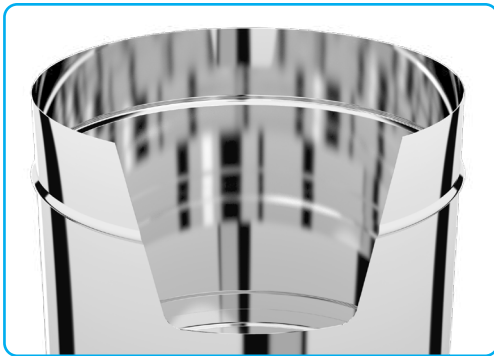

Essential Features

- Simple and fast installation.
- Suitable for in-shaft applications.

Muff	: 50 mm
Weld Type	: Continuous TIG Welding
Thickness	: 0.40 mm - 1.50 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm to 1200 mm

Technical Features

Operation Type	: Wet (W) (sealed use)
Pressure Type	: Positive (P1) (sealed use) Negative (N1) (use without gasket)
Max. Operating Pressure	: 200 Pa
Operating temperature	: 100 °C 400 °C
Material	: AISI 316L (1.4404), AISI 304 (1.4301) AISI 430 (1.4016)
Fuel Type	: Natural gas / Solid fuel / Liquid fuel

Fields of Application


- Central heating and hot water systems
- Industrial and commercial chimney systems
- Bread ovens
- Fireplaces
- Vents


Certificates

T400-N1-W-Vm-L50-(40&100)-O150, Ø100-300
T400-P1-W-Vm-L50-(40&100)-O150, Ø100-300
T400-N1-W-Vm-L50-(40&120)-O300, Ø301-450
T400-P1-W-Vm-L50-(40&120)-O300, Ø301-450
T400-N1-W-Vm-L50-(60&150)O600, Ø451-1200
T400-P1-W-Vm-L50-(60&150)O600, Ø451-1200


Chimney Labeling

Product Type	TS EN 1856	T400	N1	W	Vm	L50	040	Q150
Standard Number	←	←	←	←	←	←	←	←
Temperature Class	←	←	←	←	←	←	←	←
Pressure Class	←	←	←	←	←	←	←	←
Condensation Product Resistance	←	←	←	←	←	←	←	←
Corrosivity category	←	←	←	←	←	←	←	←
Chimney Material	←	←	←	←	←	←	←	←
Chimney Material Thickness	←	←	←	←	←	←	←	←
Soot Fire Resistance Distance to Flammable Substances	←	←	←	←	←	←	←	←

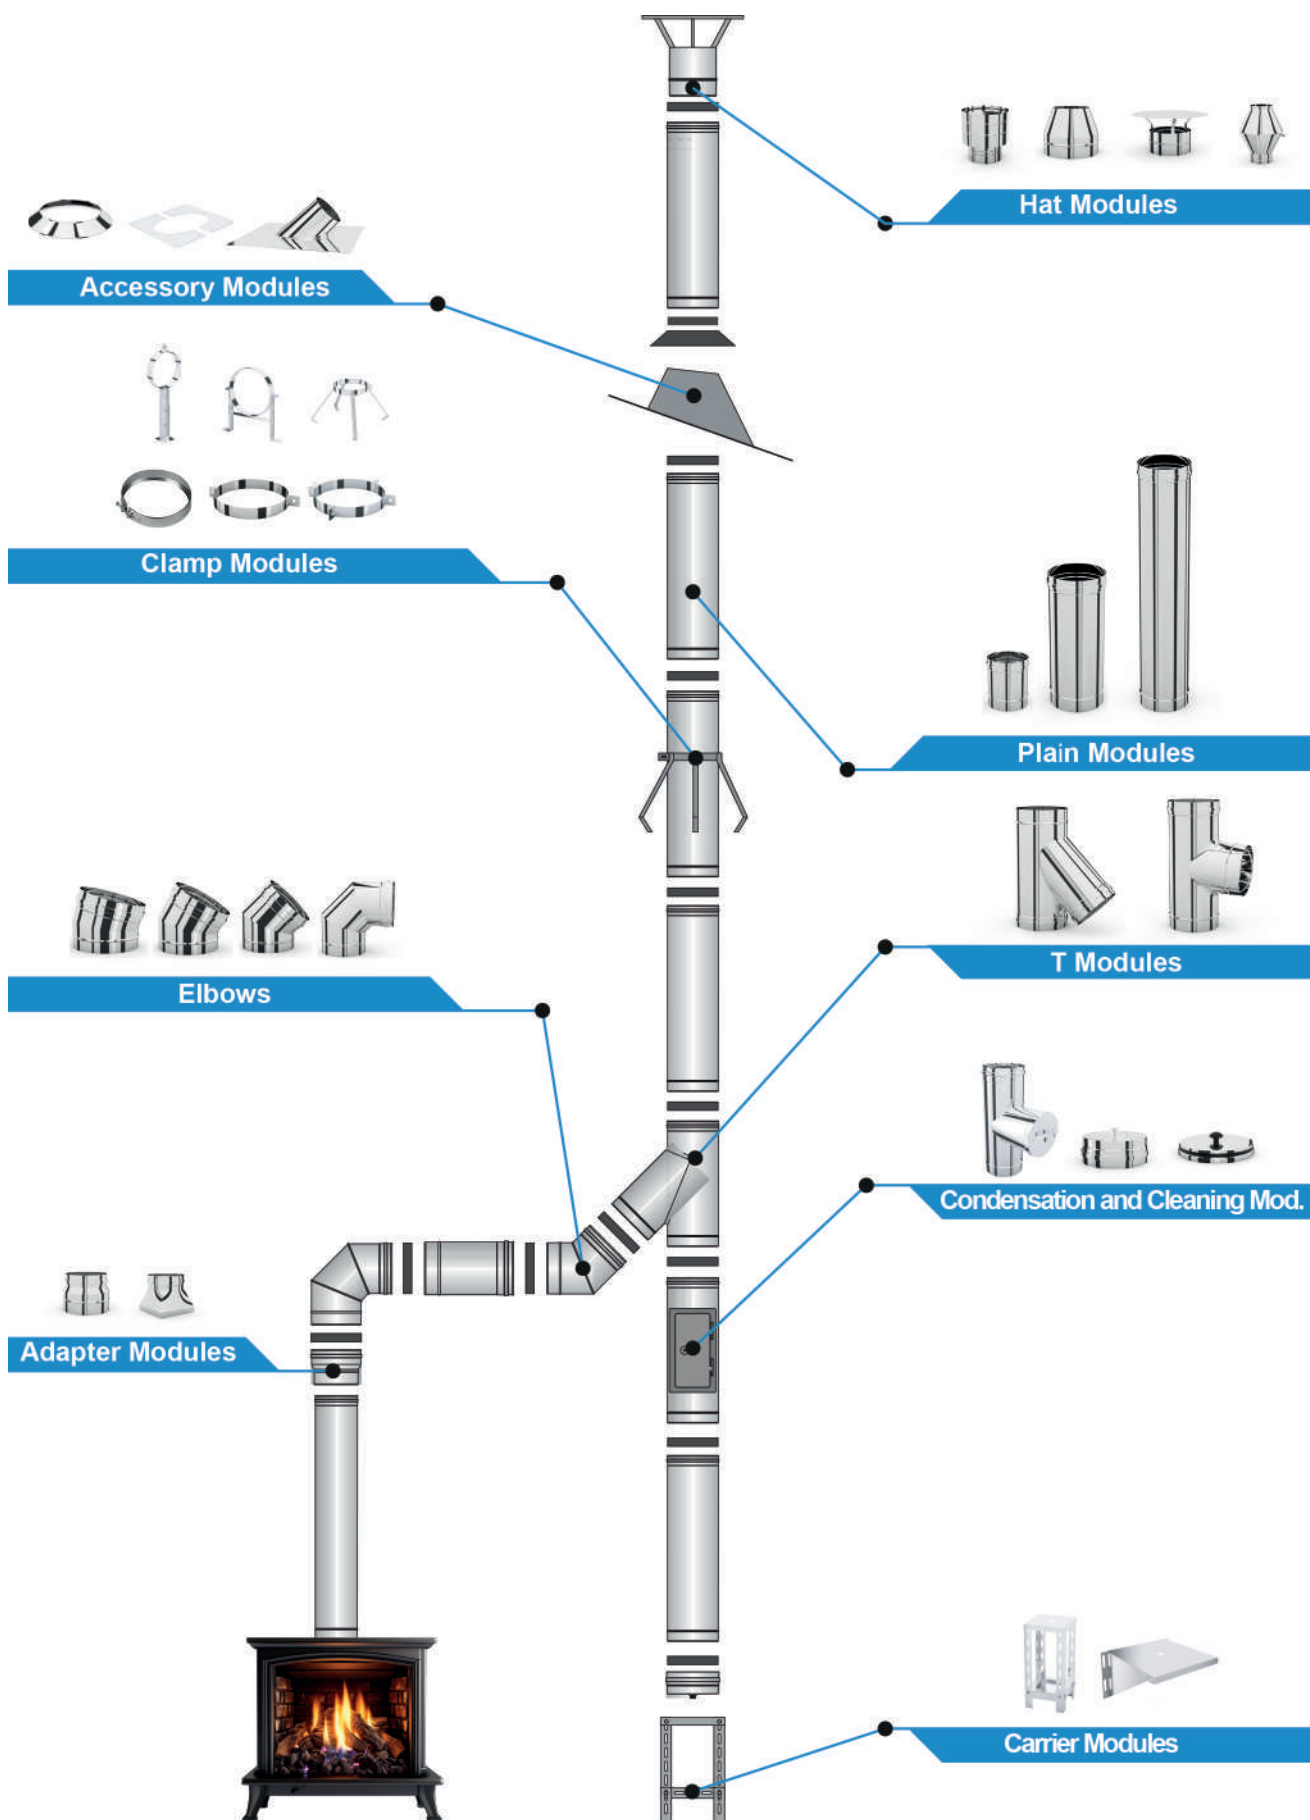


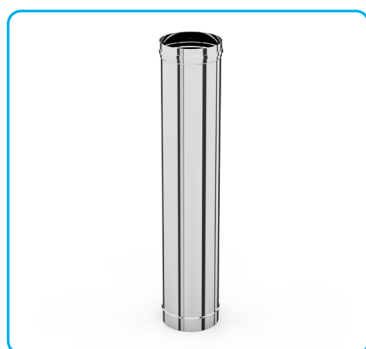



ALPT1000		Flat Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50





ALPT500		Flat Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50



ALPT250		Flat Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50

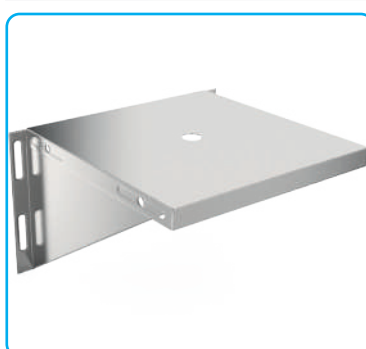


ALPT47TD		Telescopic Support Module 270-470 mm									
D	100	150	200	250	300	350	400	450	500	550	600
M n	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50


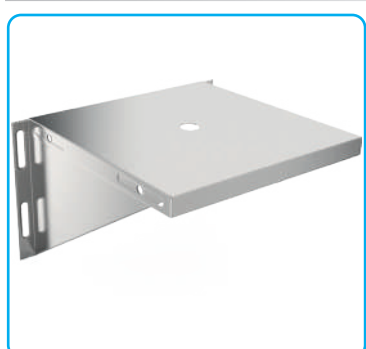


ALPT90TD		Telescopic Support Module 550-900 mm									
D	100	150	200	250	300	350	400	450	500	550	600
M n	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50


Elbows




ALPTD15						15° Elbow					
D	100	150	200	250	300	350	400	450	500	550	600
A	110	114	118	133	137	140	143	154	157	160	164
8	110	114	118	133	137	140	143	154	157	160	164
m	50	50	50	50	50	50	50	50	50	50	50





ALPTD30						30° Elbow					
D	100	150	200	250	300	350	400	450	500	550	600
A	117	136	144	162	181	188	207	214	235	242	261
8	117	136	144	162	181	188	207	214	235	242	261
m	50	50	50	50	50	50	50	50	50	50	50



ALPTD45						45° Elbow					
D	100	150	200	250	300	350	400	450	500	550	600
A	138	160	180	205	216	241	264	292	308	332	372
B	138	160	180	205	216	241	264	292	308	332	372
m	50	50	50	50	50	50	50	50	50	50	50




ALPTD90						90° Elbow					
D	100	150	200	250	300	350	400	450	500	550	600
A	123	150	170	187	217	235	255	277	300	317	342
B	146	189	222	270	312	353	395	437	479	520	560
C	123	150	170	187	217	235	255	277	300	317	342
m	50	50	50	50	50	50	50	50	50	50	50



ALPTTM87

Tee Module 87°


D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50



ALPTTM90

Tee Module 90°


D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	350	450	450	550	550	650	650	700	950
B	135	160	185	210	235	270	295	320	345	395	420
m	50	50	50	50	50	50	50	50	50	50	50



ALPTTM45

Tee Module 45°

D	100	150	200	250	300	350	400	450	500	550	600
H	283	350	450	550	650	650	950	950	950	999	1247
B	175	215	275	330	390	400	555	565	570	580	700
m	50	50	50	50	50	50	50	50	50	50	50




ALPTKT90


Cascade Tee 90°

D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	200	200	200	200	200	200	200	200	200
C	100										
m	50	50	50	50	50	50	50	50	50	50	50



Reduction and Cleaning Modules




ALPTTKM	Module with Cleaning Cover										
D	100	150	200	250	300	350	400	450	500	550	600
A	256	256	256	256	256	256	256	256	256	256	256
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




ALPTR	Reduction-Adaptor										
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50





ALPTKR	Square Reduction										
D	100	150	200	250	300	350	400	450	500	550	600
H	-	-	-	-	-	-	-	-	-	-	-
BXB	-	-	-	-	-	-	-	-	-	-	-




ALPTTK	Circular Cleaning Cover										
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




ALPTKC	Sealed Cap										
D	100	150	200	250	300	350	400	450	500	550	600
A	107	157	207	257	307	357	407	457	507	557	607




ALPTYT		Condensate Collector									
D	100	150	200	250	300	350	400	450	500	550	600
A	80	80	80	80	80	80	80	80	80	80	80




ALPTYT		Horizontal Condensate Collector									
D	100	150	200	250	300	350	400	450	500	550	600
A	130	130	130	130	130	130	130	130	130	130	130



ALPTOM250		Measurement Module 250 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	200										
m	50	50	50	50	50	50	50	50	50	50	50




ALPTOM500		Measurement Module 500 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	450										
m	50	50	50	50	50	50	50	50	50	50	50




ALPTOM1000		Measurement Module 1000 mm									
D	100	150	200	250	300	350	400	450	500	550	600
H	950										
m	50	50	50	50	50	50	50	50	50	50	50


Hat Modules




ALPTCS					Chinese Hat						
D	100	150	200	250	300	350	400	450	500	550	600
H	120	120	120	120	120	120	120	120	120	120	120
m	50	50	50	50	50	50	50	50	50	50	50





ALPTYKS					Rain Protected Hat						
D	100	150	200	250	300	350	400	450	500	550	600
H	200	200	250	250	250	250	250	250	250	250	250
m	50	50	50	50	50	50	50	50	50	50	50





ALPTKS					Conus Hat						
D	100	150	200	250	300	350	400	450	500	550	600
H	140	140	140	140	170	170	170	170	170	170	170
m	50	50	50	50	50	50	50	50	50	50	50




ALPTJC					Jet Cap						
D	100	150	200	250	300	350	400	450	500	550	600
H	200	300	400	500	600	700	800	900	900	950	1000
A	175	260	350	440	525	600	650	700	750	800	850

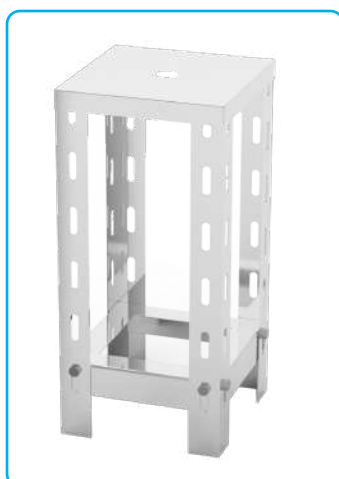

ALPTTT		Basic Carrier									
D	100	150	200	250	300	350	400	450	500	550	600
A	150	150	200	250	300	350	400	450	500	550	600
B	360	360	360	360	360	360	360	360	360	360	360

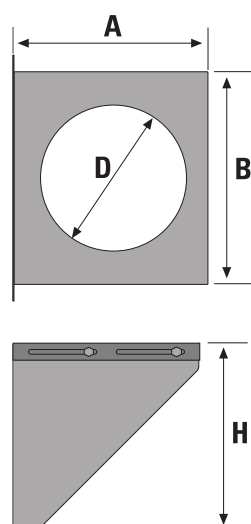
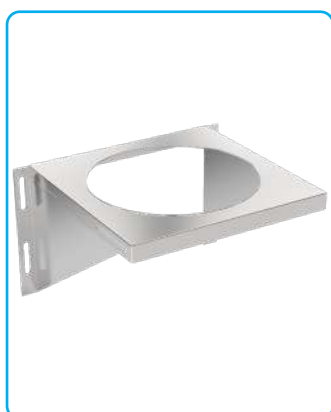


ALPTDTS		Wall-Type Stand									
D	100	150	200	250	300	350	400	450	500	550	600
A	170	220	270	320	370	420	470	520	570	620	670
B	200	250	300	350	400	450	500	550	600	650	700
H	170	220	270	320	370	420	470	520	570	620	670




ALPTDSK		Wall Mounting Clamp									
D	100	150	200	250	300	350	400	450	500	550	600
A	130	175	225	276	300	329	380	430	480	508	536
X	55-75	60 mm									


Accessory Modules

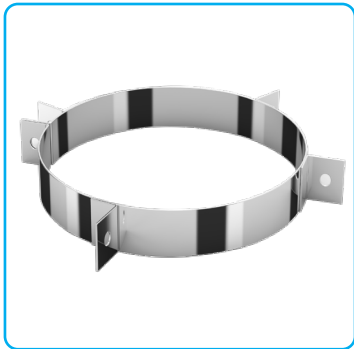


ALPTGK		Tensioning Clamp											
D	100	150	200	250	300	350	400	450	500	550	600		




ALPTAK		Hanger Clamp											
D	100	150	200	250	300	350	400	450	500	550	600		





ALPTCOB		Roof Cover Ring											
D	100	100	150	200	250	300	350	400	450	500	550	600	650
A	190	210	260	310	390	440	490	540	590	640	690	740	790
C	80	80	80	80	80	100	100	100	100	100	100	100	100





ALPHTHT				Crescent Carrier								
D	100	100	150	200	250	300	350	400	450	500	550	600
C	200 - 300 - 400 - 500 - 600 mm											





ALPTBK		Joining Clamp										
D	100	150	200	250	300	350	400	450	500	550	600	
A	47 mm											

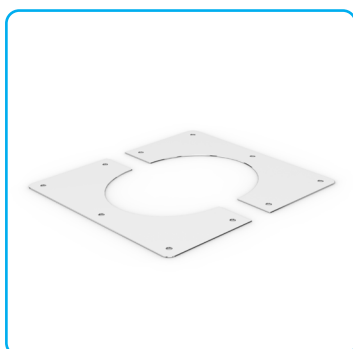

ALPTDK30		Wall Cover 30											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	160	190	220	250	280	310	335	360	-	-	-	-	

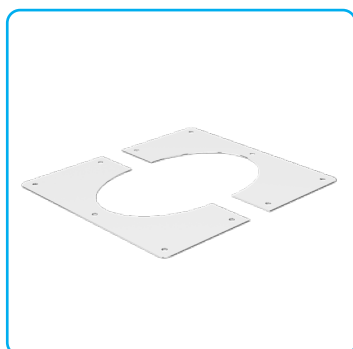


ALPTDK45		Wall Cover 45											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	175	210	245	280	320	350	410	460	-	-	-	-	


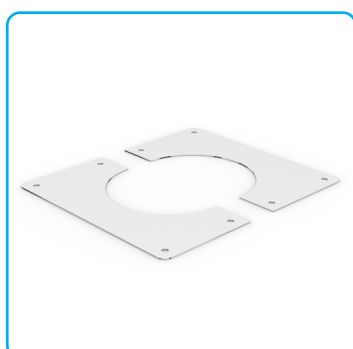


ALPTDK90		Wall Cover 90											
D	100	150	200	250	300	350	400	450	500	550	600	650	
A	300	350	400	450	500	550	600	650	-	-	-	-	
B	160	185	210	235	260	285	310	335	-	-	-	-	


Accessory Modules





ALPTAK		Octopus Clamp											
D	100	150	200	250	300	350	400	450	500	550	600	650	

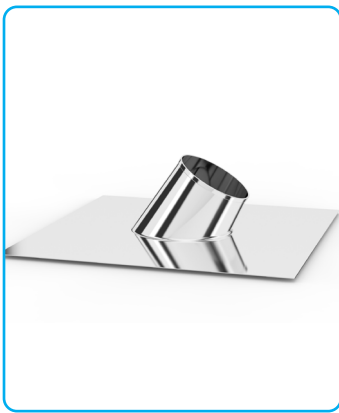


ALPTCOK30				Roof Cover Coating 30								
D	100	150	200	250	300	350	400	450	500	550	600	650
A	550	600	660	710	770	820	880	930	980	-	-	-
B	530	580	640	690	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	130	195	255	310	370	425	485	540	600	-	-	-



ALPTCOK45				Roof Cover Coating 45								
D	100	150	200	250	300	350	400	450	500	550	600	650
A	555	640	710	780	850	920	960	1000	1100	-	-	-
B	535	620	690	760	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	155	240	310	380	450	520	590	665	735	-	-	-

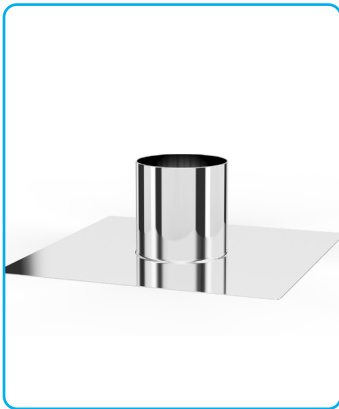

ALPTCOK90				Roof Cover Coating 90								
D	100	150	200	250	300	350	400	450	500	550	600	650
A	560	610	660	710	760	810	860	910	960	-	-	-
B	560	610	660	710	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	150	-	-	-
C	160	210	260	310	360	410	460	510	560	-	-	-

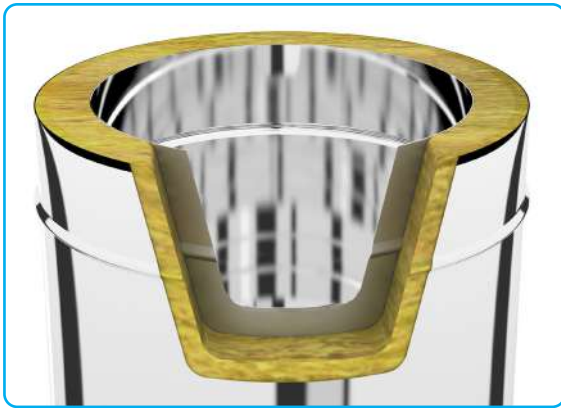

Essential Features

- Simple and fast installation.
- Suitable for indoor and outdoor applications.
- High density rock wool insulation.

Muff	: 50 mm
Welding Type	: Continuous TIG Welding
Thickness	: 0.40 mm - 1.50 mm
Connection type	: Male / Female Connections
Diameter Range	: Ø 100 mm to 1200 mm

Technical Features

Operation Type	: Wet (W) (sealed use)
Pressure Type	: Positive (P1) (sealed use) Negative (N1) (use without gasket)
Max. Operating Pressure	: 200 Pa
Working Temperature	: 100 °C 400 °C
Material	: AISI 316 (1.4404), AISI 430L (1.4016) AISI 304 (1.4301)
Fuel Type	: Natural gas / Solid fuel / Liquid fuel

Fields of Application

- Central heating and hot water systems
- Industrial and commercial chimney systems
- Bread ovens
- Fireplaces
- Vents


Certificates


T400-N1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-P1-W-Vm-L50-(40&100)-O150,Ø100-300
T400-N1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-P1-W-Vm-L50-(40&120)-O300,Ø301-450
T400-N1-W-Vm-L50-(60&150)-O600,Ø451-1000
T400-P1-W-Vm-L50-(60&150)-O600,Ø451-1000

Chimney Labeling


Product Type	TS EN 1856	T400	N1	W	Vm	L50	040	Q150
Standard Number	←	←	←	←	←	←	←	←
Temperature Class	←	←	←	←	←	←	←	←
Pressure Class	←	←	←	←	←	←	←	←
Condensation Product Resistance	←	←	←	←	←	←	←	←
Corrosivity category	←	←	←	←	←	←	←	←
Chimney Material	←	←	←	←	←	←	←	←
Chimney Material Thickness	←	←	←	←	←	←	←	←
Soot Fire Resistance Distance to Flammable Substances	←	←	←	←	←	←	←	←

Module Definitions


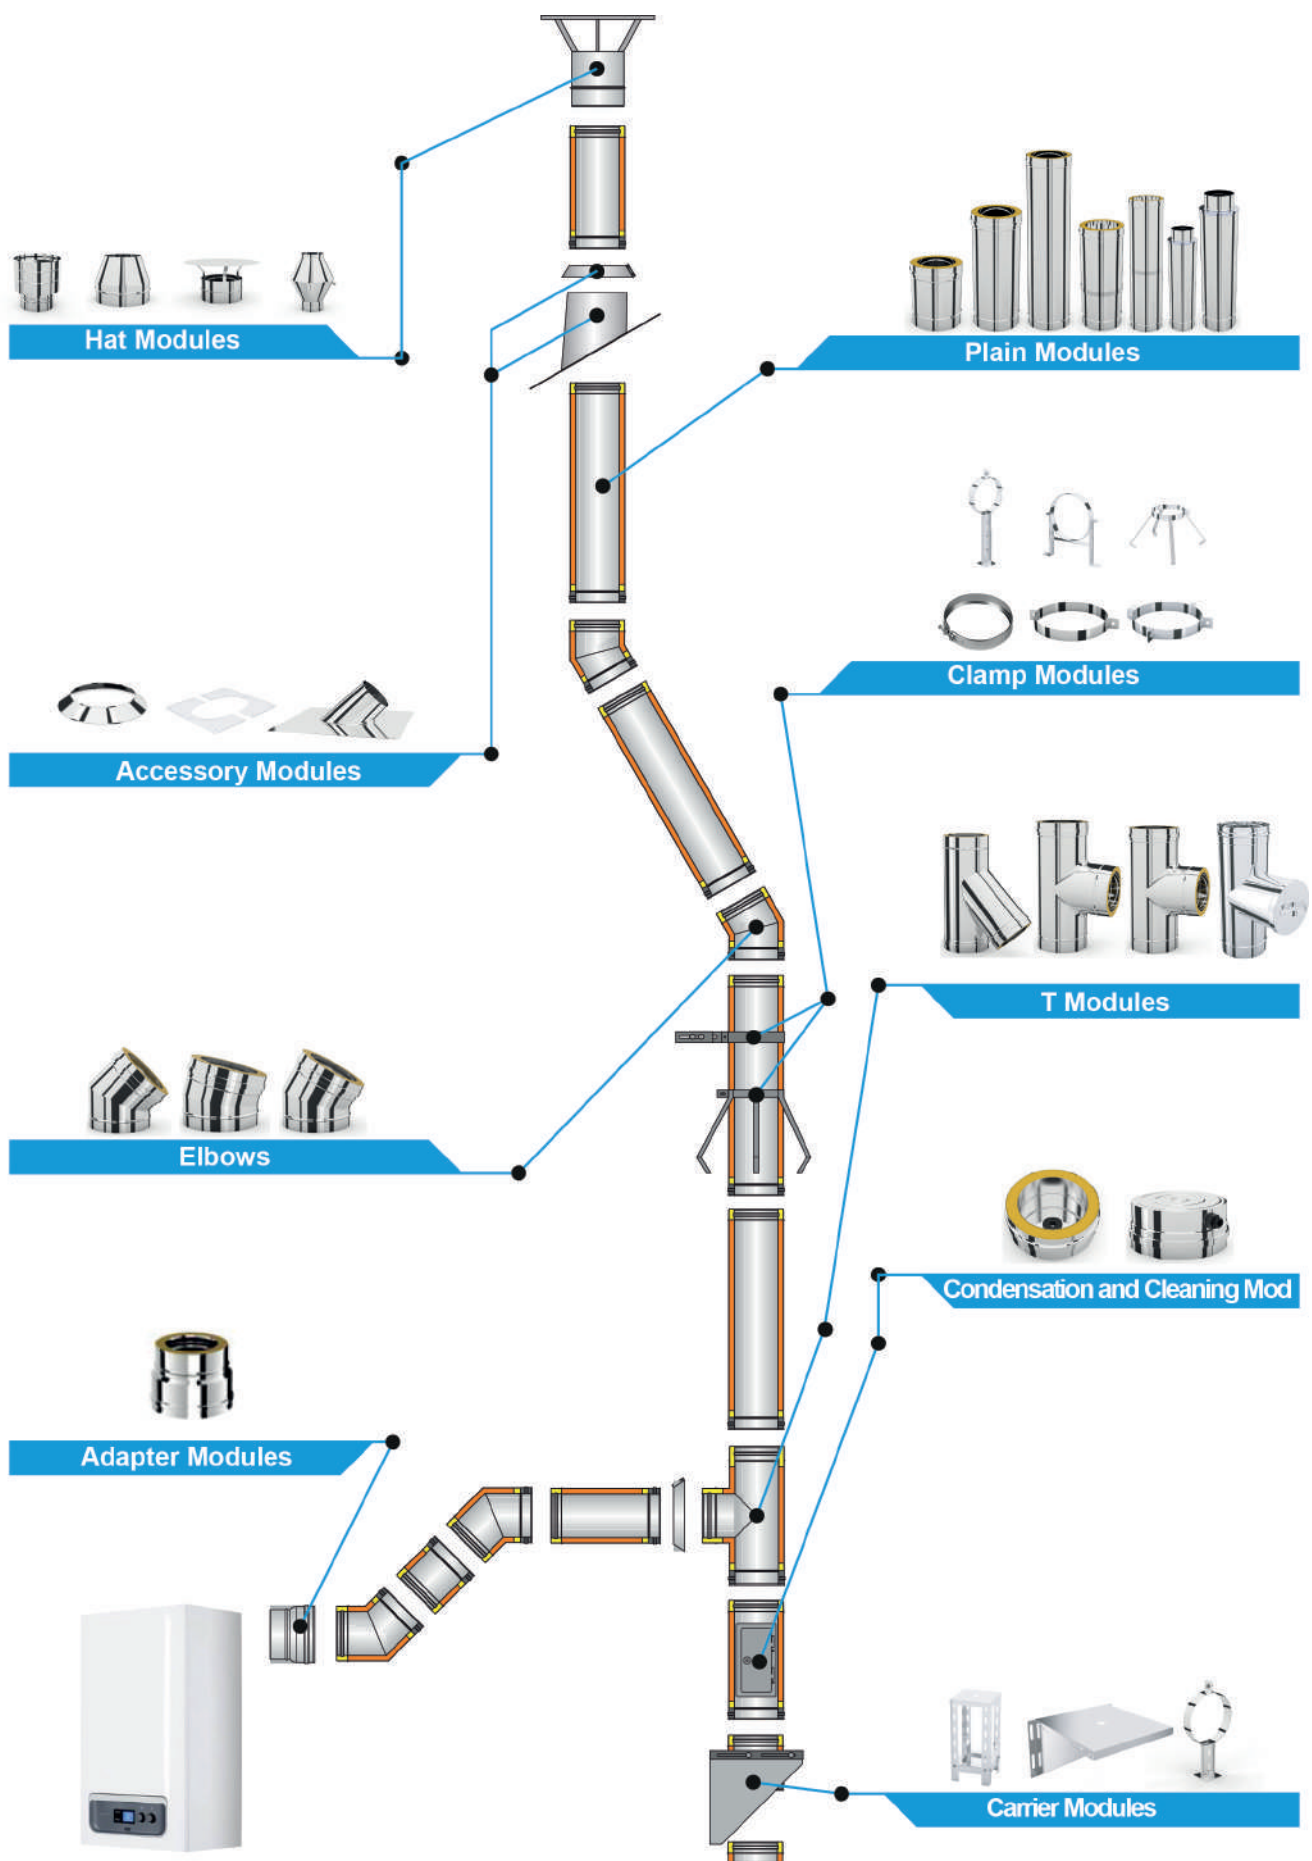




ALPC250		Insulated Flat Module 250 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50




ALPC500		Insulated Flat Module 500 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50



ALXAB1000		Insulated Flat Module 1000 mm									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50


Plain Modules



ALPCTM47

Isolated Telescopic Module 270-470 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
Min	240	240	240	240	240	240	240	240	240	240	240
Max	420	420	420	420	420	420	420	420	420	420	420
m	50	50	50	50	50	50	50	50	50	50	50



ALPCTM90

Isolated Telescopic Module 550-900 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
Min	490	490	490	490	490	490	490	490	490	490	490
Max	920	920	920	920	920	920	920	920	920	920	920
m	50	50	50	50	50	50	50	50	50	50	50



ALPCBM500

Starter Module 500 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-




ALPCBM1000

Starter Module 1000 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	-	-	-	-	-	-
m	50	50	50	50	50	-	-	-	-	-	-



	ALPC15		Insulated Elbow 15°									
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
A	114	118	121	136	140	143	146	157	161	164	167	
B	114	118	121	136	140	143	146	157	161	164	167	
m	50	50	50	50	50	50	50	50	50	50	50	




	ALPC30		Insulated Elbow 30°									
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
A	125	143	150	170	189	195	215	222	243	250	269	
B	125	143	150	170	189	195	215	222	243	250	269	
m	50	50	50	50	50	50	50	50	50	50	50	




	ALPC45		Insulated Elbow 45°									
d	100	150	200	250	300	350	400	450	500	550	600	
D	150	200	250	300	350	400	450	500	550	600	650	
A	148	170	194	217	227	253	275	303	319	344	384	
B	148	170	194	217	227	253	275	303	319	344	384	
m	50	50	50	50	50	50	50	50	50	50	50	


T Modules




ALPCTP87	Insulated T-Piece 87°										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	450	450	550	550	650	700	700	950	950
B	160	185	210	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50




ALPCTP90	Insulated T-Piece 90°										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	450	450	550	550	650	700	700	950	950
B	160	185	210	235	260	295	320	345	370	420	445
m	50	50	50	50	50	50	50	50	50	50	50




ALPCTP45	Insulated T-Piece 45°										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	350	450	550	650	650	950	950	950	950	1200	1200
B	210	270	325	385	390	550	555	565	580	705	705
m	50	50	50	50	50	50	50	50	50	50	50



ALPCTKM	Module with Cleaning Cover										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	256	256	256	256	256	256	256	256	256	256	256
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50




ALPCDTK	Isolated Circular Cleaning Cover										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80



ALPCYT	Isolated Condensate Collector										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	80	80	80	80	80	80	80	80	80	80	80


Measurement Modules



ALPCOM250

Isolated Measurement Module 250 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	200	200	200	200	200	200	200	200	200
m	50	50	50	50	50	50	50	50	50	50	50



ALPCOM500

Isolated Measurement Module 500 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	450	450	450	450	450	450	450	450	450	450	450
m	50	50	50	50	50	50	50	50	50	50	50



ALPCOM1000

Isolated Measurement Module 1000 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	950	950	950	950	950	950	950	950	950	950	950
m	50	50	50	50	50	50	50	50	50	50	50




ALPCCOM250

2" Roof Measurement Module 250 mm


d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
C	100	100	100	100	100	100	100	100	100	100	100
M	50	50	50	50	50	50	50	50	50	50	50




ALPCCS		Chinese Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	170	170	170	170	170	-	-	-	-	-	-



ALPCYKS		Rain Protected Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	250	250	300	300	300	-	-	-	-	-	-




ALPCKS		Conus Hat									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	200	200	250	250	250	250	250	300	300	300	300




ALPCJC		Jet Cap									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
H	300	400	500	600	700	800	900	900	950	1000	1050
A	260	350	440	525	600	650	700	750	800	850	900


Accessory Modules




ALPCTT	Basic Carrier										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	150	200	250	300	350	400	450	500	550	600	650
B	360	360	360	360	360	360	360	360	360	360	360




ALPCKTS	Wall-Type Stand										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	220	270	320	370	420	470	520	570	620	670	720
B	270	320	370	420	470	520	570	620	670	720	770
H	220	270	320	370	420	470	520	570	620	670	720




ALPCDSK	Wall Mounting Clamp										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	175	225	276	300	329	380	430	480	508	536	-
X	60 mm										





ALPCA K	Hanger Clamp										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650





ALPCCOB	Roof Cover Ring										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	260	310	390	440	490	540	590	640	690	740	790
C	80	80	80	100	100	100	100	100	100	100	100





ALPCHT	Crescent Carrier										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550		650
C	200 - 300 - 400 - 500 - 600 mm										

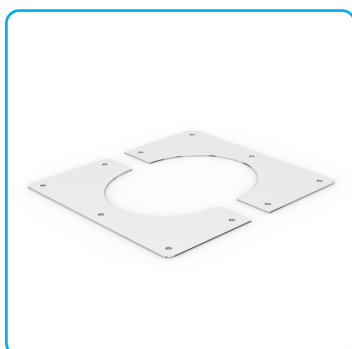

ALPCDK30	Wall Cover 30										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	190	220	250	280	310	335	360	-	-	-	-

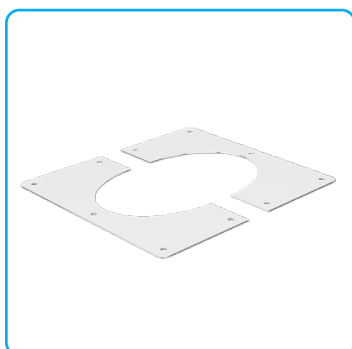


ALPCDK45	Wall Cover 45										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	210	245	280	320	350	410	460	-	-	-	-


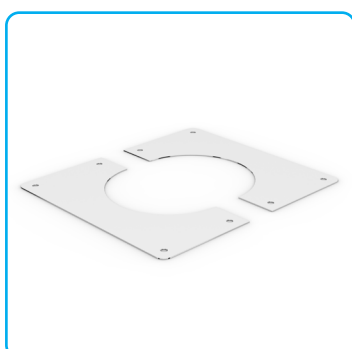


ALPCDK90	Wall Cover 90										
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	350	400	450	500	550	600	650	-	-	-	-
B	185	210	235	260	285	310	335	-	-	-	-


Accessory Modules




ALPCA		Octopus Clamp									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650



ALPCCOK30		Roof Cover Coating 30									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	600	660	710	770	820	880	930	980	-	-	-
B	580	640	690	750	800	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	195	255	310	370	425	485	540	600	-	-	-



ALPCCOK45		Roof Cover Coating 45									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	640	710	780	850	920	960	1000	1100	-	-	-
B	620	690	760	830	900	940	980	1080	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	240	310	380	450	520	590	665	735	-	-	-



ALPCCOK90		Roof Cover Coating 90									
d	100	150	200	250	300	350	400	450	500	550	600
D	150	200	250	300	350	400	450	500	550	600	650
A	610	660	710	760	810	860	910	960	-	-	-
B	610	660	710	760	810	860	910	960	-	-	-
H	150	150	150	150	150	150	150	150	-	-	-
C	210	260	310	360	410	460	510	560	-	-	-

Chimney Engineer



ALPINOX
Chimney Engineer

BACAMAK

Konsan Organize Sanayi Fevzi Çakmak Mahallesi
10728 Sokak No: 23 Karatay / Konya
Phone : 0332 346 05 15
Fax : 0332 346 03 15